

AROLLA AQUA M-LT & S-LT CL3043; CL3029

USER MENU

24th APRIL 2026



USER MENU GUIDE

IMPORTANT: Please note all the default setting are highlighted in a grey colour.

SETUP

Main Menu	Level 1	Level 2	Level 3	Choices / Values
SETUP	DMX Address	→	→	001 - 512
	Channel Mode	Standard Mode	→	Standard mode
		Basic Mode		
	Wireless Setting	W-DMX On / Off	→	On / Off
		Operating Mode	Receive	Receive
			Transmit	
		Link	Link	-
			Unlink	
		Receive Reset	No	-
			Yes	
	Wireless to DMX	→	No / Yes	
	Ethernet Interface	Source	→	DMX Art-Net sACN
		Custom IP Address	IP address byte 1	0 - 255
			IP address byte 2	0 - 255
			IP address byte 3	0 - 255
		Custom IP Mask	IP mask byte 1	0 - 255
			IP mask byte 2	0 - 255
	IP mask byte 3		0 - 255	
	Universe	→	000 - 255	
	Ethernet to DMX	→	No	
Yes				

OPTION

Main Menu	Level 1	Level 2	Level 3	Choices / Values	
OPTION	Sunsafe	→	→	On / Off	
	Pan / Tilt	Invert Pan	→	→	On / Off
		Invert Tilt	→	→	On / Off
		Swap Pan-Tilt	→	→	On / Off
		Absolute position	→	→	On / Off
		Encoder Pan-Tilt	→	→	On / Off
		P/T Homing mode	→	→	Standard Sequenced
		Pan Home Def Pos	→	→	0 degree 90 degrees 180 degrees 270 degrees
		Tilt Home Def Pos	→	→	0 % 12.5 % 25 % 50 % 75 % 87.5 % 100 %
		P/T Smooth	→	→	On / Off
		P/T Speed	→	→	Slow Speed Medium Speed Fast Speed Follow Spot
	P/T Disable	→	→	On / Off	
	Zoom/Focus speed	→	→	STD Boost	
	Colour	Fix Wheel Shortcut	→	→	RGB / CMY
					On / Off
	CMY Speed	→	→	→	Normal / Fast
	Colour dimming delay	→	→	→	On / Off
	Dimmer curve	→	→	→	Curve 1 Curve 2 Curve 3 Curve 4 Curve 5
	Dimmer fade	→	→	→	On / Off
	Display	→	→	→	On / Off

Main Menu	Level 1	Level 2	Level 3	Choices / Values
	Fan Mode	→	→	Auto SLN Theatre Constant
OPTION	PWM Frequency	→	→	600Hz 1200Hz 2000Hz 4000Hz 6000Hz 20000Hz
	Setting	Default Preset	→	Reset to Default Go Back
		User Preset 1	→	Load preset 1 Save to preset 1
		User Preset 2	→	Load preset 2 Save to preset 2
		User Preset 3	→	Load preset 3 Save to preset 3

INFORMATION

Main Menu	Level 1	Level 2	Level 3	Choices / Values
INFORMATION	System Errors	→	→	Read / Reset
	Fixture Hours	Total Hours	→	Read only
		Partial Hours	→	Reset / Go Back
	LED Hours	Total Hours	→	Read only
		Partial Hours	→	Reset / Go Back
	System Version	x.xx	→	Fw.rev.
	DMX Monitor	Functions	→	<i>DMX in value (Bit)</i>
	Fans Monitor	BASE Fan	→	Percentage %
		LED Fan	→	Percentage %
	Network parameters	→	→	IP Address
		→	→	IP Mask
		→	→	MAC Address
	UID	→	→	UID: xxxxxxxxxxxx
	System Monitor	Led temp	→	xx °C
		Head humidity	→	xx %
Base humidity		→	xx %	

MANUAL CONTROL

Main Menu	Level 1	Level 2	Level 3	Choices / Values
MANUAL CONTROL	Reset	→	→	No / Yes
	Channels	→	→	Bit value

TEST

Main Menu	Level 1	Level 2	Level 3	Choices / Values
TEST	→	→	→	Pan / Tilt
	→	→	→	Colour
	→	→	→	Beam
	→	→	→	Gobos
	→	→	→	Shutter
	→	→	→	All

ADVANCED

Main Menu	Level 1	Level 2	Level 3	Choices / Values
ADVANCED	Access Code <u>1234</u>	Upload Firmware	→	Yes / No
		Calibration	Effect selection	000 - 255
		Menu Locking	→	1234
		Recover	→	Yes / No

SET UP MENU

Setup → DMX Address

Important: Without the input signal, the displayed DMX Address blinks.

It lets you select the DMX address for the control signal. A DMX address between 001 and 512 can be selected.

Setup → DMX Channel

It lets you select the DMX channel mode selecting from Standard or Basic.

Setup → WIRELESS SETTING

W DMX On/Off

It let you enable (On) or disable (Off) the W-DMX

Operating mode

Allow you to set the operating mode of the fixtures as transmitter or receiver.

Link

Allows you to link/unlink receivers. If the fixture is set as "Transmitter" it allows to create a connection with another receiver device.

Receive Reset

Allow you to reset the receive configurations. Select "Yes" to disconnect (reset) it from a previous device connected.

Wireles to DMX

It let you to Enable or Disable the transmission of the Wireless protocol by DMX signal

- NO: DMX transmission disabled.
- YES: DMX transmission enabled.

SET UP MENU

Setup → Ethernet Interface

It lets you set Ethernet settings to be assigned to the fixture as indicated below:

Source

It let you assign the control Protocol.

Custom IP Address

It lets you assign the IP Address according to the used control unit.

Custom IP Mask

It lets you assign the Subnet Mask according to the used control unit.

Universe

It lets you assign a Universe to a series of fixtures. Values between 000 and 255.

Ethernet to DMX

It lets you enable or disable the transmission of the Ethernet protocol by the DMX line. When activated the master unit transfer the DMX data to all the connected fixtures.

- NO: DMX data transmission disabled.
- YES: DMX data transmission enabled.

OPTION MENU**Option → Sunsafe**

It lets you enable (ON) the function "Sunsafe" that in case of absence of signal it turns the Led engine off and head moves downwards. Select OFF to turn off or disable this option.

Option → Pan / Tilt**INVERT PAN**

It lets you enable (ON) the Pan reverse movement. Select OFF to turn off or disable this option.

INVERT TILT

It lets you enable (ON) the Tilt reverse movement. Select OFF to turn off or disable this option.

SWAP PAN-TILT

It lets you enable (ON) Pan and Tilt parameters inversion (and simultaneously Pan fine and Tilt fine). Select OFF to turn off or disable this option.

ABSOLUTE POSITION

When this function is turned ON, the fixture remembers its exact position and, after power cycles, hard resets, or accidental movement, returns to the programmed spot. Select OFF to disable this feature.

ENCODER PAN-TILT

It lets you enable (ON) or disable (OFF) the Pan and Tilt Encoder functionality.

P/T HOMING MODE

It lets you set the initial Pan and Tilt Reset mode.

- **Standard:** Pan & Tilt are simultaneously reset.
- **Sequenced:** Tilt is reset first followed by Pan.

PAN HOME DEF POS

It lets you assign the Pan parameter "Home" position at the end of Reset (without a DMX input signal), selecting one from the 4 available positions:

- **0 - 90 - 180 - 270 (degree)**

TILT HOME DEF POS

It lets you assign the Tilt parameter "home" position at the end of Reset (without a DMX input signal), selecting one from the 7 available positions:

- **0% 12.5% 25% 50% 75% 87.5 100%**

P/T SMOOTH

It lets you set (ON) a more linear ramp in and ramp out of the Pan & Tilt movement.

With OFF the function is not active and the Pan&Tilt are faster.

P/T SPEED

It lets you set select the speed of Pan & Tilt between the option below:

- Slow Speed / Medium Speed / **Fast Speed** / Follow Spot

Option → Zoom/Focus Speed

It lets you set select the speed of Zoom & Focus between the option below:

- **STD** / Boost

Option → COLOR

FIX WHEEL SHORT-CUT

Used to optimize the change time of fixed color wheel, selecting **ON** the static color wheel turns in the direction that requires the shorter movement when you select a color position. Select OFF to disable the option.

Option → CMY Speed


It lets you select two different CMY filters movement speed:

- **Normal**
- **Fast**

Option → DIMMER CURVE

It lets you select one of the following different dimmer curves:

- **Curve 1**
- **Curve 2**
- **Curve 3**
- **Curve 4**
- **Curve 5**

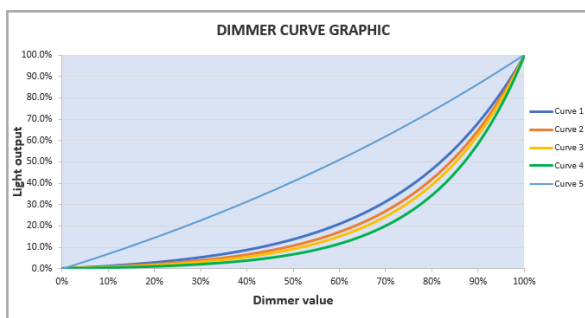

Option → DIMMER FADE

It lets you enable (**ON**) the Dimmer fade below the 25% level. Select OFF to turn off or disable this option.

OPTION MENU**Option → DISPLAY**

It lets display brightness reduction automatically after 30 seconds in idle status (OFF). Select ON, display keeps on.

Option → FAN MODE

Defines the fixture cooling mode:

- **Auto:** Cooling increase/decrease in correlation to the LED module temperature
- **SLN:** Fan power always at minimum range, light output change accordingly with ambient temperature
- **Theatre:** The fans power is always at a constant range, light output constantly reduced.
- **Constant:** The fans power is always at maximum range.

Option → PWM Frequency

It lets you select different frequencies of LEDs:

- 600 Hz
- 1200 Hz
- 2000 Hz
- 4000 Hz
- 6000 Hz
- 25000 Hz

Option → SETTINGS

Used to save 3 different settings of the items in the option menu and relevant submenus.

- Default preset (*)
 - User preset 1
 - User preset 2
 - User Preset 3
- **Load to preset 'X'** is used to recall a previously stored configuration.
 - **Save to preset 'X'** is used to save the current configuration.

IMPORTANT: (*) DEFAULT PRESET It lets you restore default values on all option menu items and relevant submenus.

INFORMATION MENU

Information → SYSTEM ERRORS

It displays the list of errors that occurred when the projector is been turned on.

To reset the SYSTEM ERRORS list, press OK. A confirmation message appears (Are you sure you want to clear error list?) Select YES to confirm the reset.

Information → FIXTURE HOURS

It lets you view the fixture's working hours (total and partial).

Total counter

It counts the number of fixtures working life hours (from construction to date). Note: This value cannot be reset.

Partial counter

It counts the partial number of fixtures working life hours from the last reset to date.

Press **Enter** to reset the partial counter. A confirmation message appears on the display: Select **Reset** to confirm or **Go Back** to undo the operation.

Information → LED HOURS

It lets you view LED working hours (total and partial).

Total counter

It counts the number of fixture working hours with the LED turned on (from construction to date). Note: This value cannot be reset.

Partial counter

It counts the partial number of LED working hours from the last reset to date.

Press **Enter** to reset the partial counter. A confirmation message appears on the display: Select **Reset** to confirm or **Go Back** to undo the operation.

Information → SYSTEM VERSION

It lets you view the firmware version for each electronic board in the projector.

Information → DMX Monitor

It lets you view the levels of DMX parameters in bits that the fixture is receiving.

Information → FAN Monitor

It lets you view the function's percentage of the fan installed in the fixture:

Base Fan cooling → Base Fan. x%

LED Fan cooling → Led Fan: x%

INFORMATION MENU

Information → Network parameters

It lets you view the Ethernet setting of the fixture:

- **IP address:** Internet Protocol address (two fixture's must not have the same IP address)
- **IP mask:** 255.0.0.0
- **Mac address:** Media Access Control; the fixture's Ethernet Address

Information → UID

It shows the RDM Unique ID (UID), the exclusive address of the fixture to communicate via RDM.

Information → Temperature

It lets you view the temperature values in different position of the fixture:

- Head LED → xx °C
- Head Zoom → xx °C
- Base → xx °C

MANUAL CONTROL MENU

Manual Control → Reset

It lets you reset the fixture's parameters from the user menu.

Manual Control → Channel

It lets you control the DMX parameters from the fixture's user menu. For any single parameter can be set the level between 0 and 255 bit.

TEST MENU

Test

It lets you perform a test of the fixture's effects by a pre-saved sequence:

- Pan and Tilt test sequence
- Colour test sequence
- Beam test sequence
- Gobo test sequence
- Shutter test sequence
- All effects test sequence

ADVANCED MENU

IMPORTANT: To access the Advanced Menu enter the code 1234.

Advanced → Upload Firmware

It lets you transfer the firmware from one fixture to all the other connected to the same line. A confirmation message will appear on the display "Are you sure?" Select YES to confirm or NO to abort the operation.

IMPORTANT: We recommend uploading the firmware to a maximum 5/6 units per time.

Advanced → Calibration

It lets you from the control panel to make a fine electronics adjustment of some effects to get a better consistency within a group of fixtures.

Advanced → Menu Locking

It allows you to assign a password to lock the access to the ADVANCED menu to avoid any wrong setting or operation by people there are not from the technical staff. The default Unlock Code is: 1234

IMPORTANT: If necessary to reset any custom code go to Option → Setting → Default Preset → Reset to default, it will set all the default setting and restore the code to 1234.

Advanced → Recover

The recover function allows to restore the functionality of the electronic boards following a failure during the firmware update process of the fixture. Please refer to the "Recover function" tech document for the detail of the procedure.