


# BLINDER II

---

## LEDNIT230

LED audience blinder reproduces the look and feel of the classic incandescent effect

Can be installed individually or paired using its innovative (optional) master bracket (sold separately)

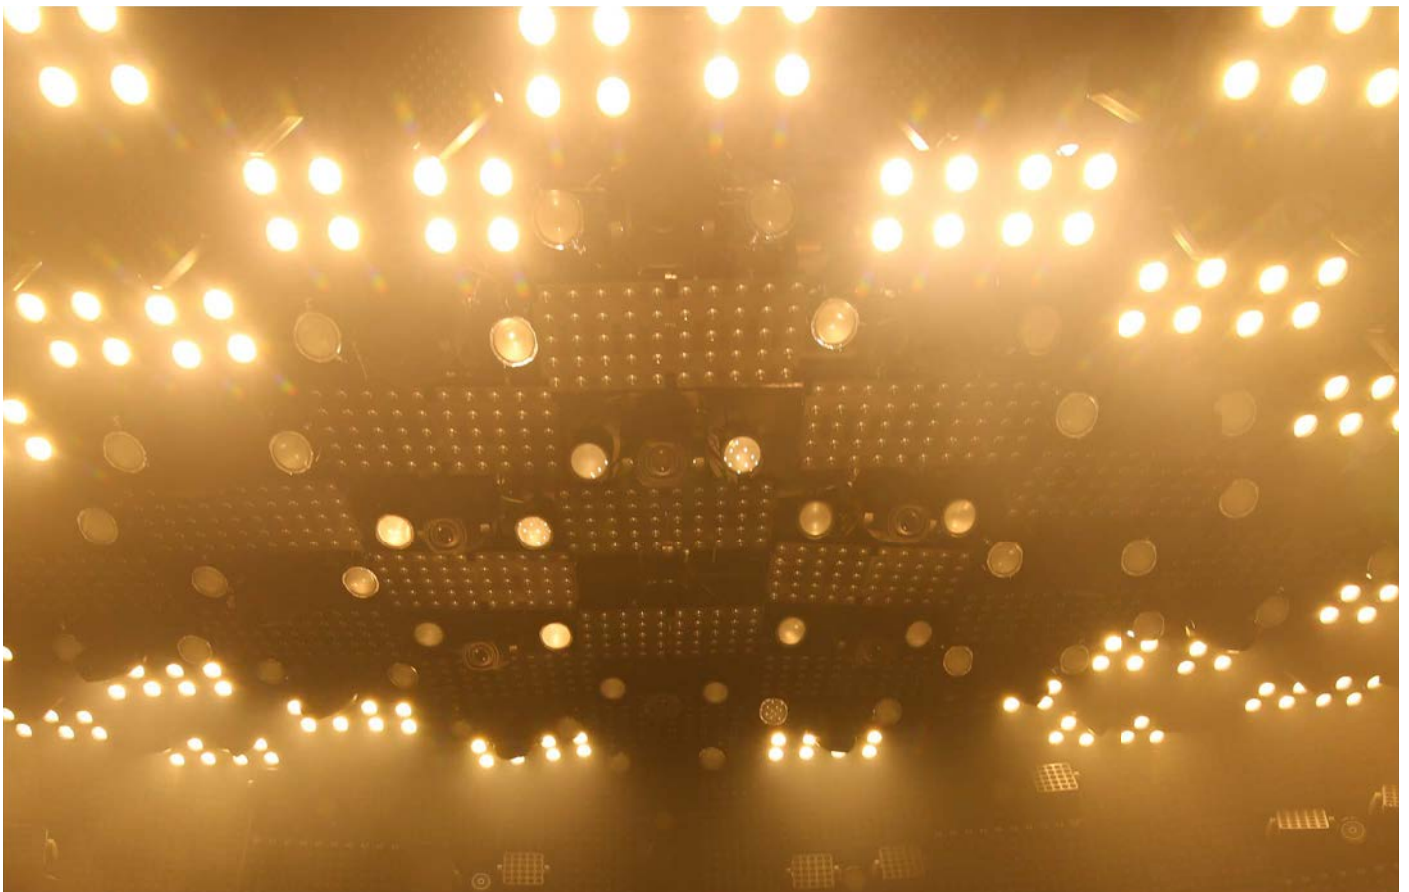


# BLINDER II

## LEDNIT230

Versatile LED audience blinder, featuring:

- 2 x 100W 3000K COB LEDs
- Flicker-free output with selectable PWM frequencies for worry-free video
- Rugged touring-grade design with versatile mounting options
- Onboard macros make for easy programming of stunning effects
- Individual control of each cell allows for programming sophisticated eye candy
- DMX control (both 3-pin and 5-pin connectors)
- Selectable dimming curve and strobe speeds
- Easy-to-read OLED menu display and navigation
- Power linking (PowerCon In/Out)

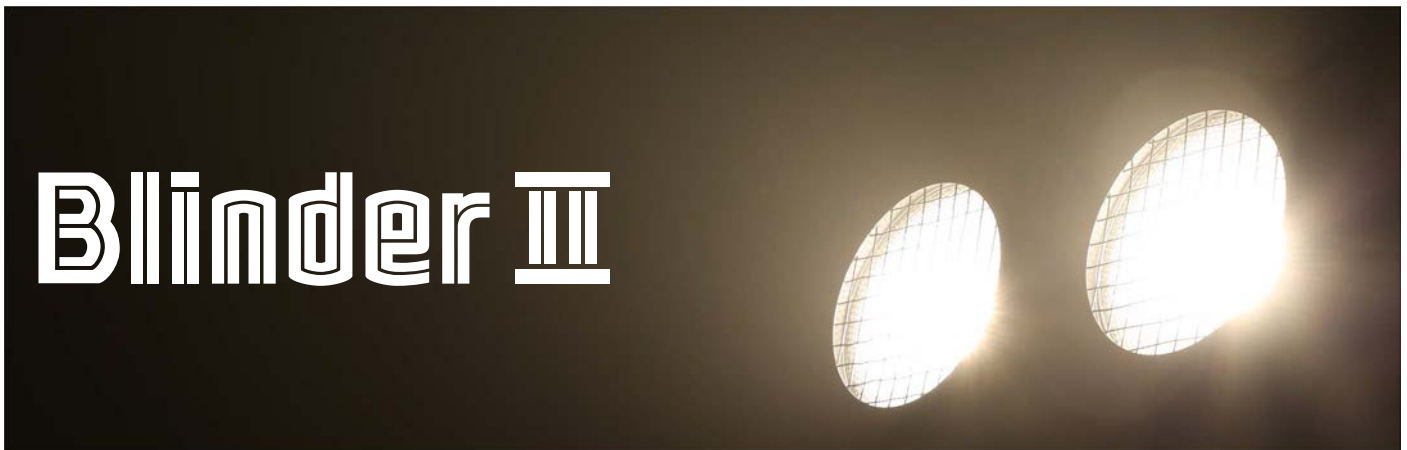

### Specifications

Product	BLINDER II
Code	LEDNIT230
Lamp Source	2 x 100W 3000K COB LEDs
Power Supply	100-240V AC, 50/60 Hz
Power Consumption	156W
DMX Connection	3-pin & 5-pin XLR In/Out


DMX Channels	1 / 2 / 4 / 7
Beam Angle	60°
Output	400 LUX @ 5 meters
Dimensions	372 (L) x 116 (W) x 214 (H) mm
Weight	4.5kg

### Optional Paired Rigging Method

#### LEDNIT231



+



Pairing Bracket  
(Sold Separately)

=

