



Radiant 3000+

EKLRAD300



The Radiant 3000+ is a high-performance LED strobe designed to excel in any application. With 60 individually controllable segments, it's easy to create dynamic effects and attention-grabbing eye candy. Foreground and background control enables layered colour effect combinations for more advanced visual design. A CCT range from 2800K to 10,000K, paired with advanced thermal design for continuous operation, makes the Radiant 3000+ an excellent flood and work light. With an IP66 rating, this extremely bright strobe can be deployed in all conditions.



SYDNEY
+61 2 9748 1122

MELBOURNE
+61 3 9681 7511

PERTH
+61 8 9248 8119

BRISBANE
+61 7 3267 3177

AUCKLAND
+64 9 869 3293



www.showtech.com.au

Radiant 3000+ Specifications

Optical System

Lamp Source	720 x 4W RGBWW
Beam Angle	118°
Field Angle	158°
CCT	2800K to 10,000K
CRI	≥90


Electrical Specifications

Voltage	100 – 240VAC 50Hz
Max Power @ 230V	Static: 1007W
Power Connection	True1 In/Out
Signal Connection	5pin DMX In/Out, 2x RJ45 EtherCON

Work Environment

Ambient Temperature	-15 to 45°C
IP Rating	IP66

Photometrics

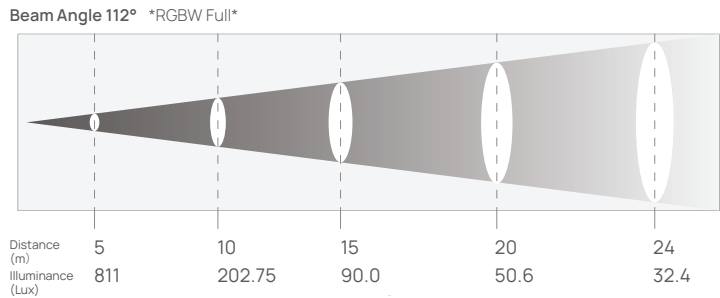

Control System

Dimmer	0 to 100% linear dimming
Cooling	Heat sink with low noise fan
Control	DMX512, RDM, Art-Net, sACN, NFC
Display	On-board control
Personality	4 x Basic, 12 x Pixel, 4 x Advanced
Pixel Matrix	5 x 12

Appearance

Size (LWH)	440 x 180.2 x 218.5mm
Weight	9.5kg
Casing	Magnesium Alloy
Colour	Black


Included Accessories

2m TrueCon

Optional Accessories

EKLRAD300F Radiant 3000+ 4 Way FlightCase

Dimensions

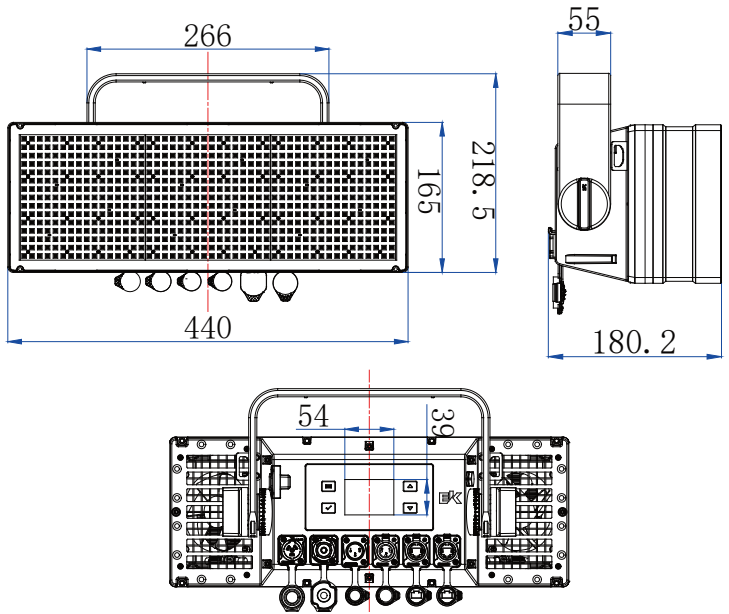

Notes

SYDNEY
+61 2 9748 1122

MELBOURNE
+61 3 9681 7511

PERTH
+61 8 9248 8119

BRISBANE
+61 7 3267 3177

AUCKLAND
+64 9 869 3293

