

# LED FRESNEL 250 HEX

LEDFRE141

The LED Fresnel 250 HEX is a 10° to 60° manual zoom fresnel with RGBALC mixing and a powerful 250W LED engine which is comparable to a 1200W incandescent fresnel. The LED Fresnel 250 HEX has CCS colour consistency control technology allowing for colour matching to be done easily with other compatible fixtures in the Silverstar range.



# Specifications

## Optical System

|             |                  |
|-------------|------------------|
| Lamp Source | 250W RGBALC      |
| Beam Angle  | 10° to 60°       |
| CRI         | > 95             |
| CCT         | 1800K to 10,000K |



## Electrical Specifications

|                   |                      |
|-------------------|----------------------|
| Voltage           | 100 – 240VAC 50/60Hz |
| Max Power         | 250W                 |
| Power Connection  | True1 In/Out         |
| Signal Connection | 5pin DMX In/Out      |

## Work Environment

|                     |             |
|---------------------|-------------|
| Ambient Temperature | 0°C to 45°C |
| IP Rating           | IP20        |

## Photometrics

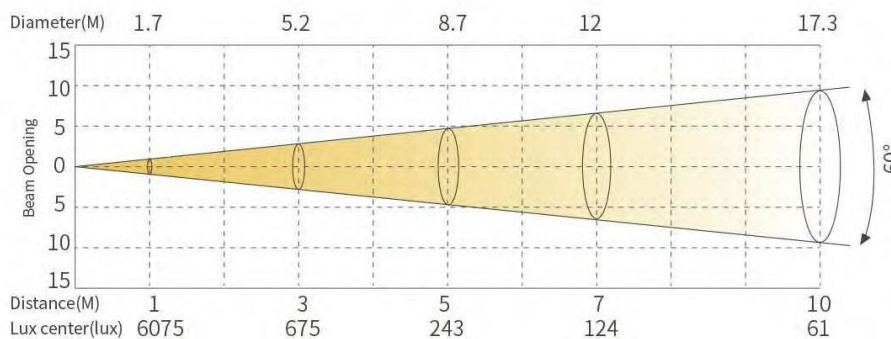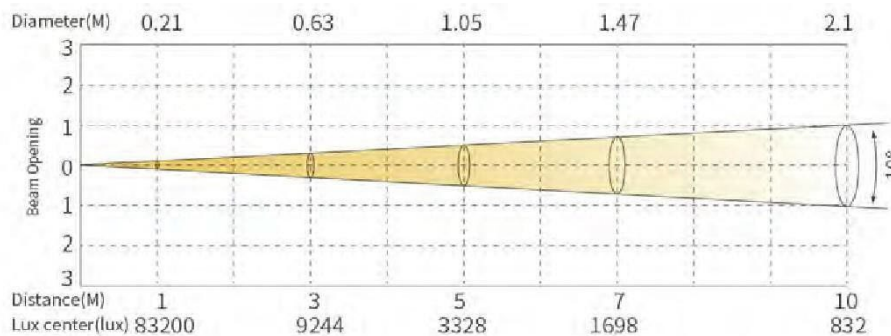

## Control System

|                |   |
|----------------|---|
| Dimmer         | 0 to 100% 16-bit                                      |
| Cooling        | Forced Convection                                     |
| Control        | DMX512, RDM   |
| Manual Control | Dimmer, CTC, Colour rotary knob                       |
| Display        | On board control, 0-25Hz strobe                       |
| Personality    | Basic(3), CLR(6), HSIC(7), SSP(9), Tour(13), TR16(20) |

## Appearance

|        |                         |
|--------|-------------------------|
| Size   | 374 x 254 x 393mm       |
| Weight | 8.8kg                   |
| Casing | Flame retardant plastic |
| Colour | Black                   |

## Optional Accessories

**LEDFRE145- Barndoors**