

E-Lite IP65

LEDLIT100

The E-Lite IP65 soft panel features an impressive 450W of power across 880 warm and cool LEDs. This allows for seamless, linear adjustment across a colour temperature range of 2700K to 6500K. It boasts an extraordinary CRI, exceeding 98, allowing for a faithful reproduction of skin tones and deep colours.

With ultra quiet fans, the E-lite IP65 is suitable for noise sensitive applications, and its IP65 rating allows operation in the harshest of environments. The included barndoors provide shuttering and shaping of the beam, and its soft, wide beam angle of 70° allows for perfect coverage.



Specifications

Optical System

Light Source	440 x WW LED, 440 x CW LED
Beam Angle	70°
Field Angle	120°
CRI	98
CCT	2700K – 6500K

Electrical Specs

Voltage	100 – 240VAC, 50/60Hz
Max Power	494W
Power Connection	TruCon In/Out
Signal Connection	5 pin XLR In/Out

Work Environment

Ambient Temperature	-20°C - 45°C
IP Rated	IP65

Control System

Dimmer	0 – 100% 16-bit
Cooling	Forced Convection
Control	DMX512, RDM
Display	On board control
Personality	UNO (1ch) / VW.D (3ch) / VW F (6Ch) / STD.P (9Ch)


Appearance

Size	652 x 119 x 348mm
Weight	11.5kg
Casing	Extruded aluminium
Colour	Black

Accessories

Barndoors	Included
-----------	----------

Photometrics

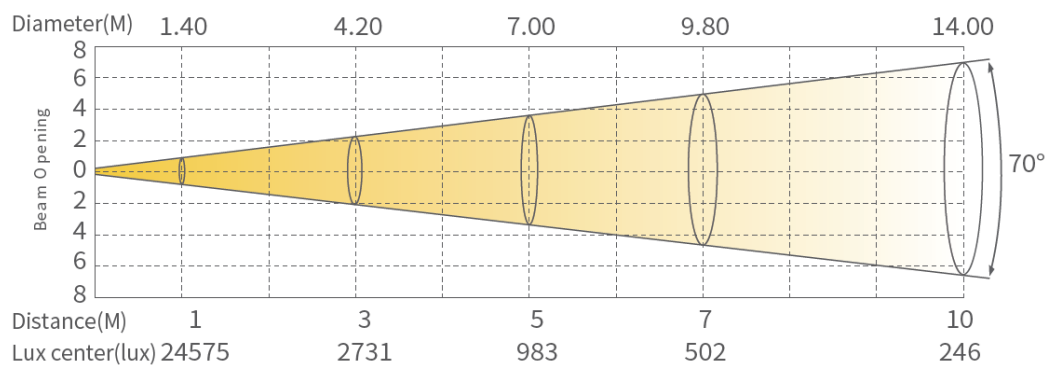

Dimensions

