

# NEPTUNE 200 BEAM IP65 MOVING HEAD

---

## LEDMOV620

Neptune 200 beam is an ultra-compact LED IP 65 rated moving head beam.

A fixed 1.7 degree beam projects a high intensity complete beam from source to projection.

Ultra-dynamic dual prisms combined with rotating gobos creates spectacular aerial visuals.

Its compact size and weight allows for high density installations at an affordable price.

Improvements in connectivity across the range now includes S-ACN, RDM, Ethernet to DMX, W-DMX and on-board Webserver



# NEPTUNE 200 BEAM IP65

## Optical System

Light Source	100W White LED module
Beam Angle	1.7°

## Electric Specs

Voltage	100-240V AC, 50/60 Hz
Max Power	180W
Driver Current	3.8A
Power Connection	Seetronic PowerKon (TRUE1 Compatible)
Data connection	3 + 5 Pin XLR, RJ45 (Art-Net)

## Control System

Pan/tilt rotation	540°/ 270° (8-16bit)
Dimmer	0-100% 16Bit
Cooling	Ultra-Quiet Fan Cooling
Control methods	DMX512, RDM, ARTNET, SACN, W-DMX
Display	OLED with onboard menu
Dimming	0-100% 16Bit
Con Personality	BASIC/12CHS, STANDARD 15CHS, EXTEND/18CHS

Special	Pan/Tilt movement blackout, user-selectable pan/tilt ranges, gravitation sensor for auto screen positioning
---------	---

## Appearance

Size	410X280X483mm
Weight	22kg
Casing	Flame-retardant plastic(V0)
Colour	Black

## Effect system

Rotating gobo	8 gobos + white, gobo flow effect, gobo shake, bi-directional rotation
---------------	--

Colours:	one colour wheel (9 dichroic filters + white, rainbow flow effect)
----------	--



Prism:	8 Facet Linear Prism and 16 Facet Standard Prism - Rotating and Indexing
--------	--

Focus:	Motorized linear focus
--------	------------------------

## Work Environment

Ambient Temp	0-45°
IP Rated	IP65

## Photometrics

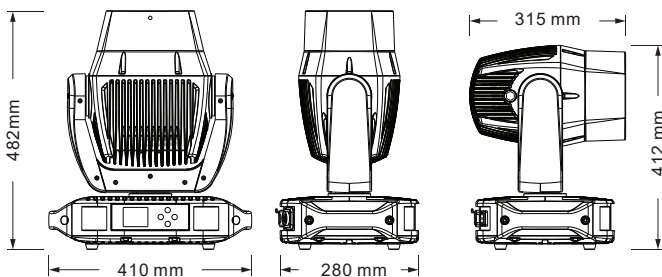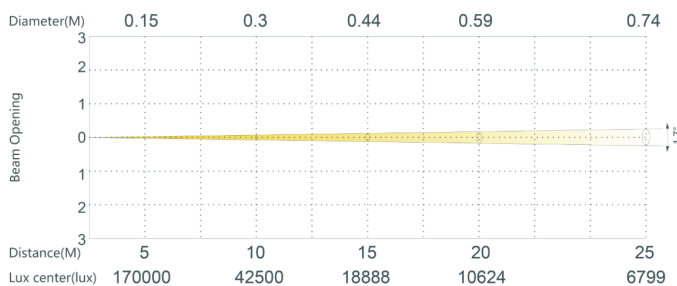

## Rotating Gobos



## Colours

