

Eclipse Profile Zoom RGBAL

LEDPRO050

The Eclipse Profile Zoom RGBAL is a compact and lightweight RGBAL profile that's designed to impress. Whether you need a high CRI CCT range from 1800K to 10000K or one of the 48 frequently used colours in the advanced CCS (Colour Consistency System), this fixture has got you covered.

The Eclipse Profile Zoom RGBAL features an integrated structural design, seamlessly incorporating the shutter framing system and boasting a manual zoom range of 25-50°. With the Eclipse Profile Zoom RGBAL, you'll experience top-notch performance and versatility in a compact form factor.



Specifications

Optical System

Lamp Source	150W RGBAL
Beam Angle	25° - 50° Manual Zoom
CRI	93
CCT	1800K – 10000K

Electrical Specs

Voltage	100 – 240VAC 50/60Hz
Max Power	170W
Power Connection	TrueCon In/Out
Signal Connection	5 pin DMX In/Out

Work Environment

Ambient Temperature	0°C - 45°C
IP Rated	IP20



Control System

Dimmer	0 – 100% 16-bit
Cooling	Forced Convection
Control	DMX512, RDM
Display	On board control, 0-25Hz strobe
Personality	Basic/SSP/TOUR/TR16/CMY
Framing System	4 blade manual shutter

Appearance

Size	568x224x191mm
Weight	6.1kg
Casing	Flame retardant plastic (V0)
Colour	Black

Photometrics

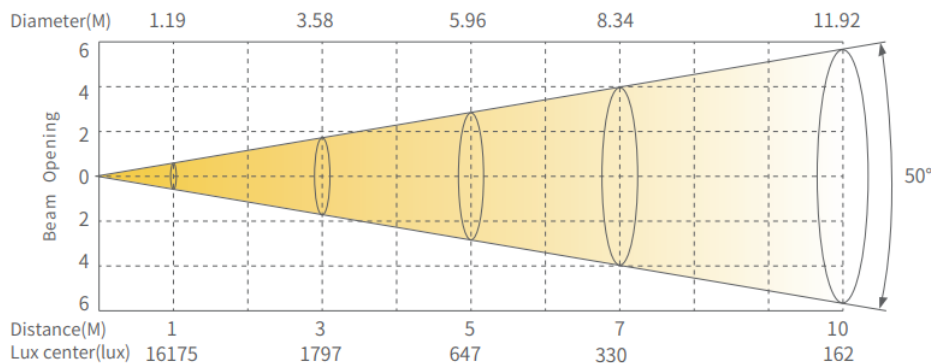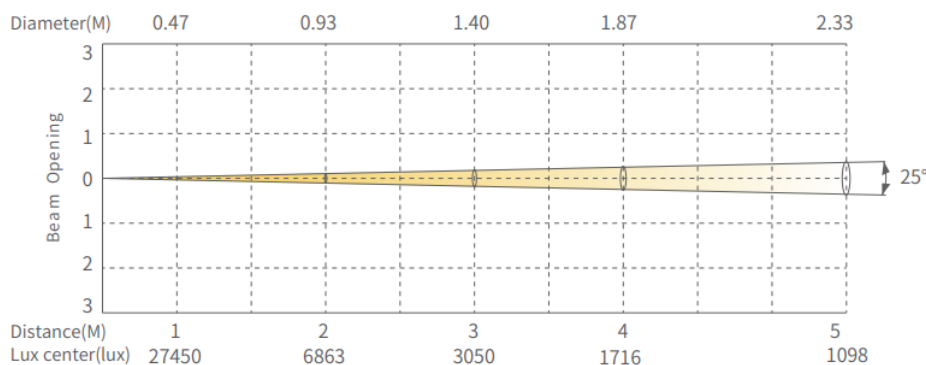

Accessories

- LEDPRO051 (TBD)** Gobo Holder
- PSHDMX410** TrueCon/DMX Link Cable 1.5m
- PSHCAB403** TrueCon/DMX Link Cable 3m
- KUPRIG071** Mini Coupler with T-Handle Black
- KUPRIG110** Large Safety Wire 10kg SWL