


DALIS - 860

CYCLIODE

Quick start guide

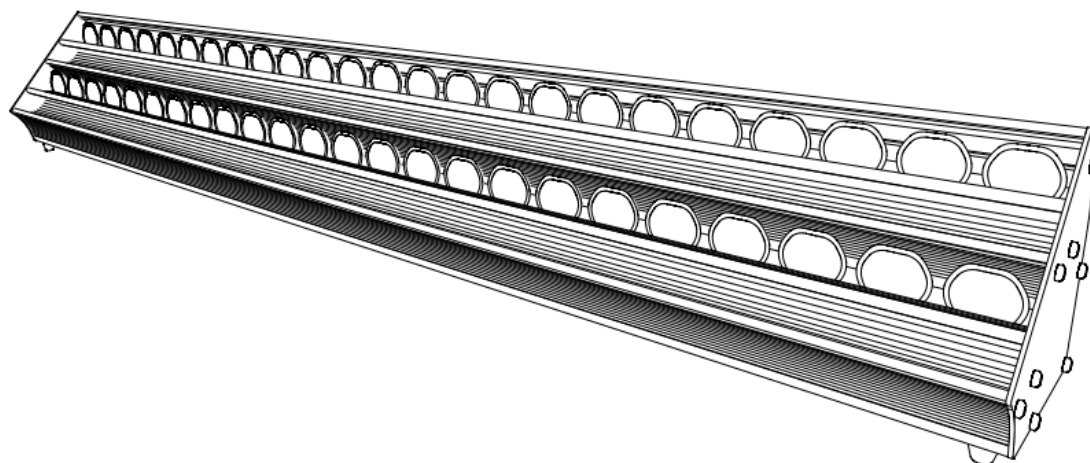


*CYCLIODE 300W LED 8 COULEURS
8 COLOURS LED 300W CYCLIGHT*




*For more information,
Please download the full manual online
http://www.robertjuliat.com/ambiance_lighting/dalis.html*

Package contents:

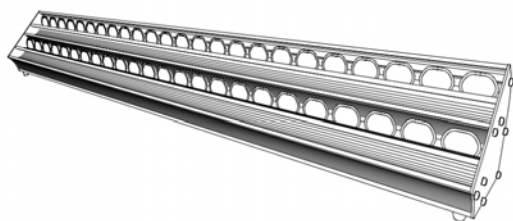

1x Dalis 860



*1x Neutrik PowerCon© True1 connector
(ref. NAC3FX-W)*

DALIS - 860
Firmware V2.XX – 10/02/16

DN41086000-B



ROBERT JULIAT

1 User's instructions

GENERAL INSTRUCTIONS

1. Not for residential use.
2. **These fixtures must only be serviced by a qualified technician.**
3. In addition to the instructions indicated on this page, relevant health and safety requirements of the appropriate EU Directives must be adhered to at all times.
4. This fixture is in compliance with section 17 - Lighting appliance for theatre stages, television, cinema and photograph studios. Standards NF EN 60598-1 and NF EN 60598-2-17.
5. This fixture is rated as IP20, and is for indoor use only.

FIXTURE

6. Ensure fixture is correctly mounted on an appropriate support.
7. Protection screens must be replaced in the event of any damage, such as cracks or deep scratches, since these might reduce performance.
8. When hung or flown the fixture must be secured by an additional hanging accessory (such as a safety cable or bond) of suitable length – only use Robert Juliat safety cables ref. QR-CS1

9. Safety bonds or cables must be securely attached to the QuickRig system of the fixture and be as short as possible, or rolled up as necessary, to minimise travel distance should the fixture be dislodged. .
10. **WARNING:** LED source become hot during use. Allow fixture to cool before servicing.
11. Do not tamper with design of fixture nor any of its safety features.
12. Tighten electrical mains cable connections regularly and replace with one of identical specification if damaged.
13. Use only with correct power supply.
14. Do not orientate the fixture towards a source of light (sun, fixture), in particular for LED versions.


VENTILATION

15. Keep well away from flammable material.
16. Not for outdoor use. Do not cover. Do not permit fixture to get wet.
17. To avoid overheating, do not obstruct air vents.

PLEASE NOTE

These products have been built to conform to European standards relating to professional lighting equipment. Any modification made to our products will void the manufacturers' warranty.

Risk Group 2




CAUTION: Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. May be harmful to the eye.


Photobiological safety according to EN62471



2 Installation

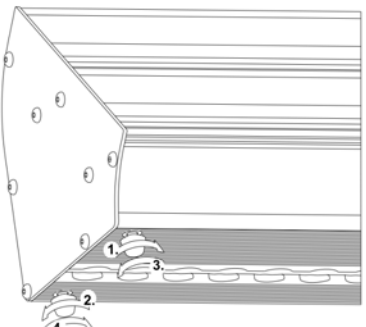



Floor installation

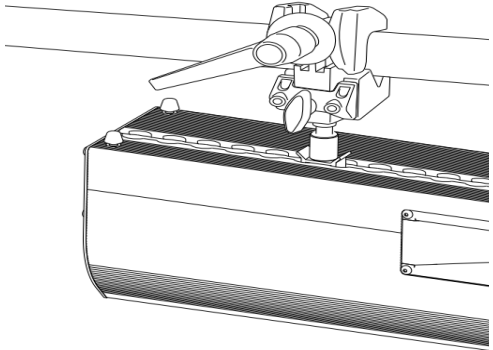


Top / side installation
Must be secured with QR-CS1 safety cable


3 QuickRig system

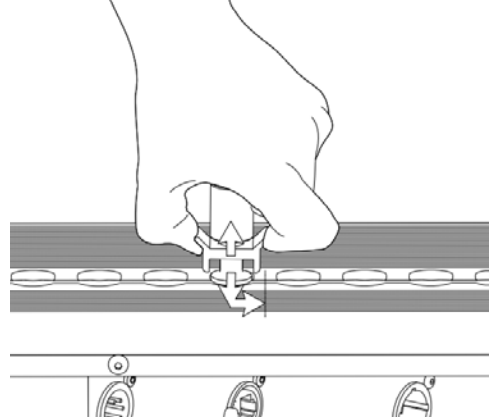

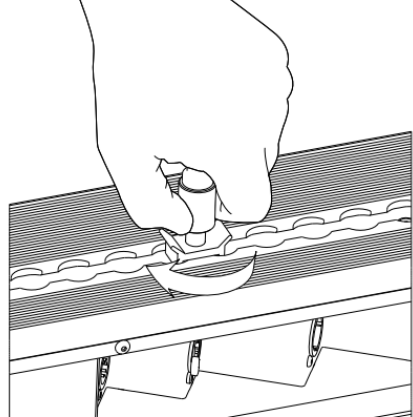

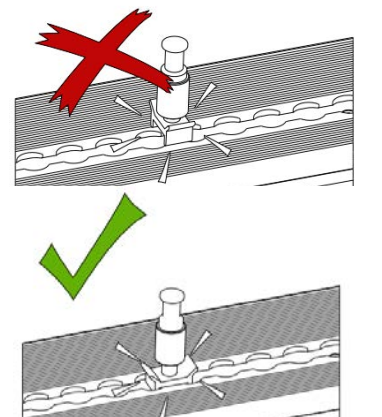


4 Electrical / Data connection

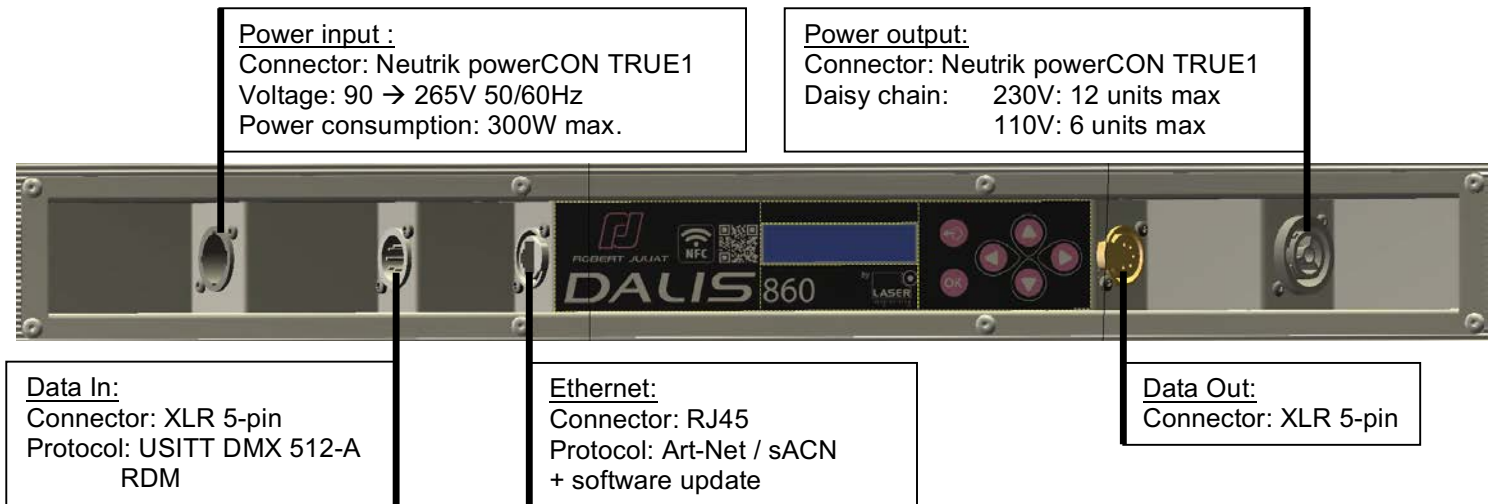

5 DMX control



DMX address and control mode selection:

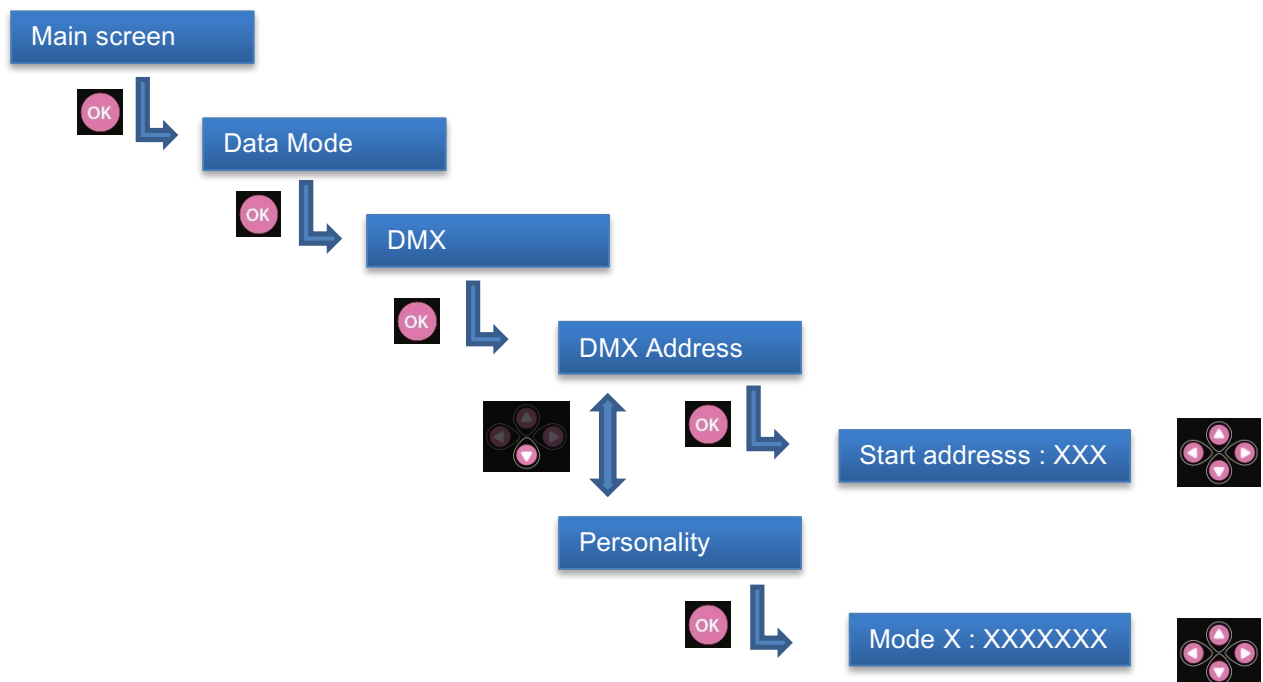

6 DMX chart

DMX address	Mode 1 Full4groupsmode16b	Mode 2 Full1groupmode16b	Mode 3 Full1groupmode8b	Mode 4 Presetmode16b	Mode 5 Presetmode8b	Mode 6 4groupsindividual16b
1	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer	Dimmer 1
2	Dimmer fine	Dimmer fine	Red	Dimmer fine	Colour presets	Dimmer fine 1
3	Red 1	Red	Green	Colour presets	CCT	Red 1
4	Red fine 1	Red fine	Blue	CCT	Strobe duration	Red fine 1
5	Green 1	Green	Royal blue	Strobe duration	Strobe speed	Green 1
6	Green fine 1	Green fine	Cyan	Strobe speed	Response time	Green fine 1
7	Blue 1	Blue	Amber	Response time	RDM OFF (>0)	Blue 1
8	Blue fine 1	Blue fine	Cool white	RDM OFF (>0)		Blue fine 1
9	Royal blue 1	Royal blue	Warm white			Royal blue 1
10	Royal blue fine 1	Royal blue fine	Strobe duration			Royal blue fine 1
11	Cyan 1	Cyan	Strobe speed			Cyan 1
12	Cyan fine 1	Cyan fine	Response time			Cyan fine 1
13	Amber 1	Amber	RDM OFF (>0)			Amber 1
14	Amber fine 1	Amber fine				Amber fine 1
15	Cool white 1	Cool white				Cool white 1
16	Cool white fine 1	Cool white fine				Cool white fine 1
17	Warm white 1	Warm white				Warm white 1
18	Warm white fine 1	Warm white fine				Warm white fine 1
19	Red 2	Strobe duration				Dimmer 2
20	Red fine 2	Strobe speed				Dimmer fine 2
21	Green 2	Response time				Red 2
22	Green fine 2	RDM OFF (>0)				Red fine 2
...
...
...
51	Red 4					Cool white 3
52	Red fine 4					Cool white fine 3
53	Green 4					Warm white 3
54	Green fine 4					Warm white fine 3
55	Blue 4					Dimmer 4
56	Blue fine 4					Dimmer fine 4
57	Royal blue 4					Red 4
58	Royal blue fine 4					Red fine 4
59	Cyan 4					Green 4
60	Cyan fine 4					Green fine 4
64	Amber 4					Blue 4
62	Amber fine 4					Blue fine 4
63	Cool white 4					Royal blue 4
64	Cool white fine 4					Royal blue fine 4
65	Warm white 4					Cyan 4
66	Warm white fine 4					Cyan fine 4
67	Strobe duration					Amber 4
68	Strobe speed					Amber fine 4
69	Response time					Cool white 4
70	RDM OFF (>0)					Cool white fine 4
71						Warm white 4
72						Warm white fine 4

