IonFLEX - Bundle of 6

SHWPAR150

The IonFLEX may have an extremely small form factor, but it certainly doesn't lack output with 4 x 20W RGBL LEDs at its source. This little and flexible unit can be rigged or placed almost anywhere, and with an IP65 rating it's ready for both indoor and outdoor use. W-DMX functionality paired with an internal battery means there are no cables to worry about, making deployment quick and hassle free. The narrow 15° beam is ideal for uplighting, truss warmers or creating tight beams, while the included 20° magnetic frost filter lets you instantly soften and widen the beam when required.





IonFLEX Specifications

Optical System

Lamp Source	4 x 20W RGBL LEDs
Beam Angle	15°
CCT	2800K to 10,000K

Electrical Specifications

Voltage	100 – 240V AC 50/60Hz
Input Voltage	DC 18V/5A
Max Power	51W
Power Connection	DC Charger
Signal Connection	Nil


Battery

Battery	Lithium
Charge Time	≈ 4.5 hours
Run Time	4 to 8h
Power Connection	DC Charger

Work Environment

Ambient Temperature	0 to 40°C
IP Rating	IP65

Photometrics

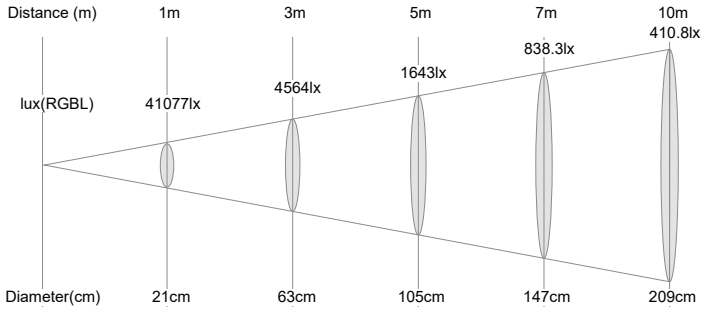

Control System

Dimmer	0 to 100% 16-bit
Control	WDMX, RDM, Bluetooth
Display	TFT Display
Personality	HSV/2/5/8/11/15ch
Cooling	Chassis cooling

Appearance

Size (LWH)	177 x 135 x 187m
Weight	2.87kg
Casing	Aluminum
Colour	Black

Included Accessories

ABS Case
Charger
6 x Hanging Bracket
6 x 20° Magnetic Frost Filter

Dimensions

