

# *dreampix*TUBE

Pixel mappable  
3D RGB LED pixel tube

**SHOW**  
TECHNOLOGY


**SHOWPRO**

# DREAMPIX TUBE

## LEDPIX205

The DREAMPIX TUBE enables awe-inspiring 3D effects with a double-sided pixel mappable RGB tube and an easy-to-use ArtNet interface that works flawlessly with popular industry-standard pixel mapping tools. featuring:

- 80 SMD 5050 RGB LEDs in a 1 x 40 (x2) pixel matrix
- 360° viewing angle
- Optimized for 3D pixel map and video effects
- User updatable firmware and uploader
- Extreme lightweight easy-to-hang design
- Art-Net control via DREAMPIX DRIVER
- 4-pin (Power+Data) extension cables available in these lengths:  
2m / 3m / 5m / 10m / 15m / 20m

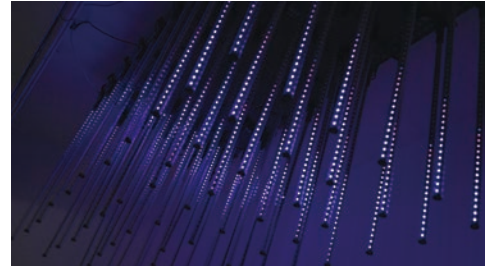

## DREAMPIX DRIVER Features

One dreampix driver powers up to: 16 x DREAMPIX TUBE

- Universal driver/ArtNet interface
- Multiple drivers may be networked in daisy-chain via EtherCon I/O
- Driver sports standard 19" 1U rackmount chassis
- Auto addressing function simplifies setup
- Onboard test mode for easy installation troubleshooting

Control Protocol:	Art-Net
Menu Navigation:	OLED display
Power:	100V-240V 50/60 Hz (auto-ranging)
Consumption:	350W
Power connections:	Neutrik PowerCon In
Data connections:	Neutrik EtherCon In/Out for Art-Net (driver) 4-pin XLR Out for data & power to fixtures

## Specifications

Product	DreamPIX TUBE
Code	LEDPIX205
Lamp Source	80 x 5050 SMD RGB LED
Power Supply	100-240V AC, 50/60Hz
Power Consumption	18W
Power/Data Connection	4-pin XLR In/Out
ArtNet Channels	120
Viewing Angle	360 °
Pixel Pitch	25mm
Dimensions	1155(L) x 28 (diameter) mm
Weight	0.6kg
Product	DreamPIX Driver
Code	LEDPIX250



SYDNEY  
+61 2 9748 1122

MELBOURNE  
+61 3 9681 7511

BRISBANE  
+61 7 3267 3177

PERTH  
+61 8 9248 8119

AUCKLAND  
+64 9 869 3293

[www.showtech.com.au](http://www.showtech.com.au)

